

B Type VCTCXO

ROHS Compliant Standard



FEATURE

- 18.3×11.7×5.0 mm.
- Compatible with 14-pin dual in line.
- Low profile size.
- Low current option (2mA for clipped sine wave o/p)

DRDING INFORMATION

Select option



Supply Voltage
E: 5.0V
T: 3.3V

Output Waveform/Fanout/Symmetry
S: Clipped sine wave/10Kohms//10pF
B: TTL/10LSTTL/50±10%
J: CMOS/15pF/50±10%


Pulling Range					
	±5ppm	±8ppm	±10ppm	±12ppm	±15ppm
2.5V±2V	A	B	C	D	E
1.65V±1.5V	F	G	H	I	J
1.5V±1V	K	L	M	N	O
T: TCXO					

Temperature Range	
C: -10°C to +60°C	E: -20°C to +70°C
I: 0°C to +70°C	U: -40°C to +85°C
W: 0°C to +55°C	H: -30°C to +75°C

Frequency Stability			
A: ±0.5ppm	B: ±1.0ppm	P: ±1.5ppm	C: ±2.0ppm
D: ±2.5ppm	E: ±3.0ppm	F: ±4.0ppm	G: ±5.0ppm

SPECIFICATION

Standard Frequency (MHz)	Clipped sine wave: 9.6MHz~30MHz TTL/CMOS: 1.2MHz~30MHz
Operating Temp. range (°C)	Refer to Numbering System
Frequency Stability	Refer to Numbering System
Supply Current (mA) max. Clipped sine wave 9.6MHz ≤ F ₀ < 20MHz 20MHz ≤ F ₀ < 30MHz TTICMOS 1.25MHz ≤ F ₀ < 20MHz 20MHz ≤ F ₀ < 30MHz	2.0 2.5 20 25
Phasa noise 100Hz 1KHz 100KHz	-110dBc/Hz -135dBc/Hz -145dBc/Hz
Operatable Temp. Range (°C)	-40~+85

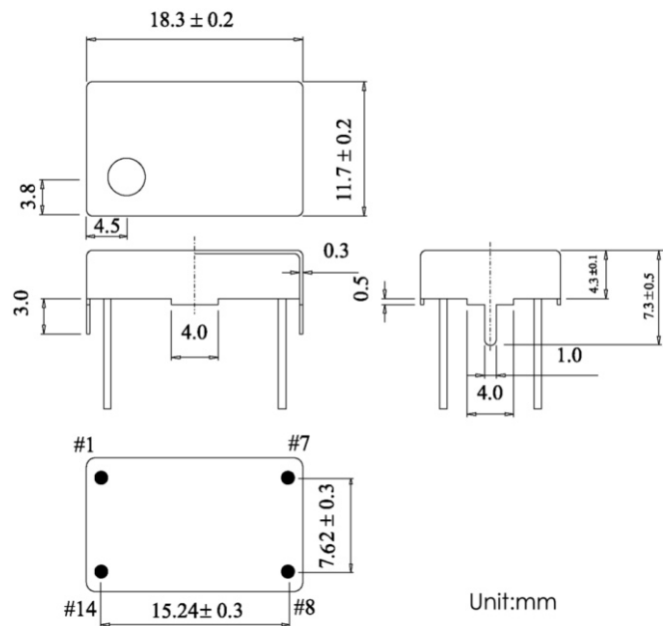

Unit:mm

FBEQ. STABILITY VS. TEMP. PANGE

Temp. (°C)	PPM	A: ±0.5	B: ±1.0	P: ±1.5	C: ±2.0	D: ±2.5	E: ±3.0	F: ±4.0	G: ±5.0
C	-10~+60	-	○	○	○	○	○	○	○
E	-20~+70	-	○	○	○	○	○	○	○
I	0~+70	-	○	○	○	○	○	○	○
U	-40~+85	-	-	-	-	-	-	-	○
W	0~+55	○	○	○	○	○	○	○	○
H	-30~+75	-	-	-	-	○	○	○	○

○:Standard △:Available(case by case)×:Not available

PIN	FUNCTION
#1	VCON
#7	GND (EARTH)
#8	O/P
#14	VDD